



Steeple (double-side) Technical data

Character

Good adaptive capacity on site. Adjust to the error of ceiling and floor
Modular production, quick installation, easy to maintainance
Steel panel is available, which can reach the high level fireproof rate

Size

Partition module width: 900、1000、1100、1200mm
The maximum height of partition: 5000mm
The thickness of partition: 104mm
The tolerance of adjustment error: ± 25 mm

Panel

0.8mm pre-coated steel panel+12mm plaster board
18mm Melamine panel
Glass panel with aluminum frame: 6mm double glass (exposed frame, hidden frame is optional)

Blind

Manual blind, 25mm wide blind
electric blind, 25mm wide blind

Hardware Accessory

Fastener: make zinc planting, spraying, antirust treatment separately accrding to material itself.
Gating accessory brand: DORMA, SELECO

Character







The sound insulation index of Planika office partition: 41-49 dB with insulator
Profile adopts stainless steel, which has a good performance on hardness and acorrosion resistance

Quality

The designing, manufacturing, producing and selling all pass cerrificate of Quality Management System ISO9001:2008 and Enviroment Mmanagement System 14001:2004. We guarantee the product's quality



Steeple (double side) Technical data

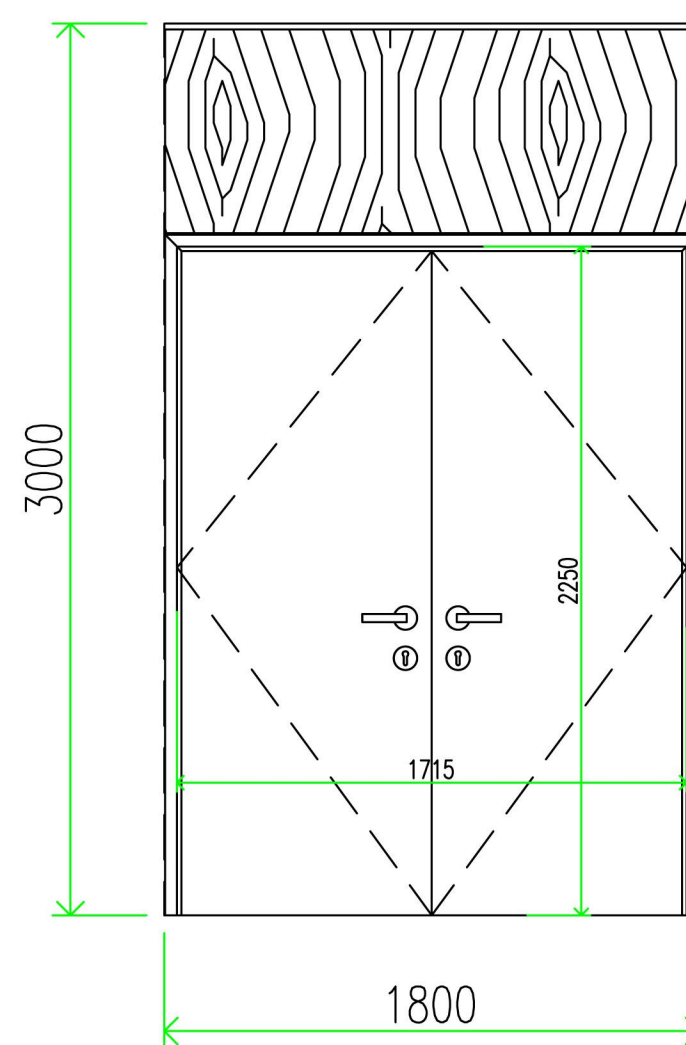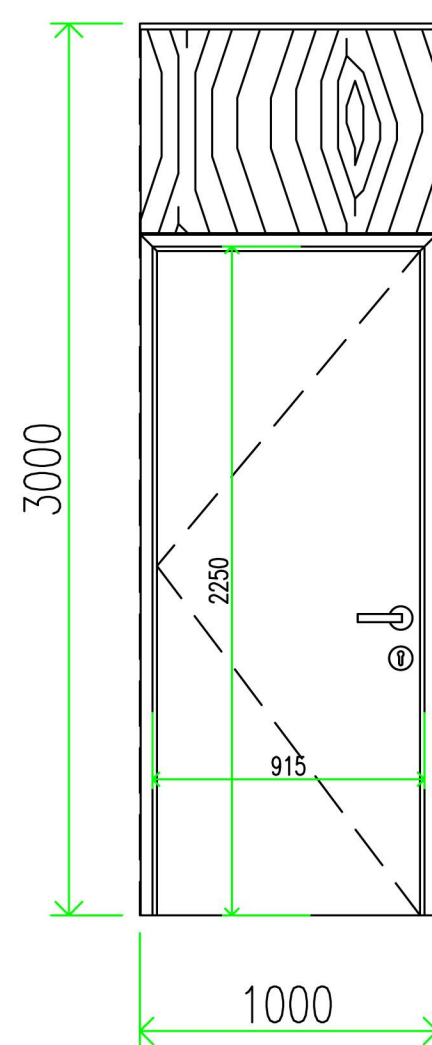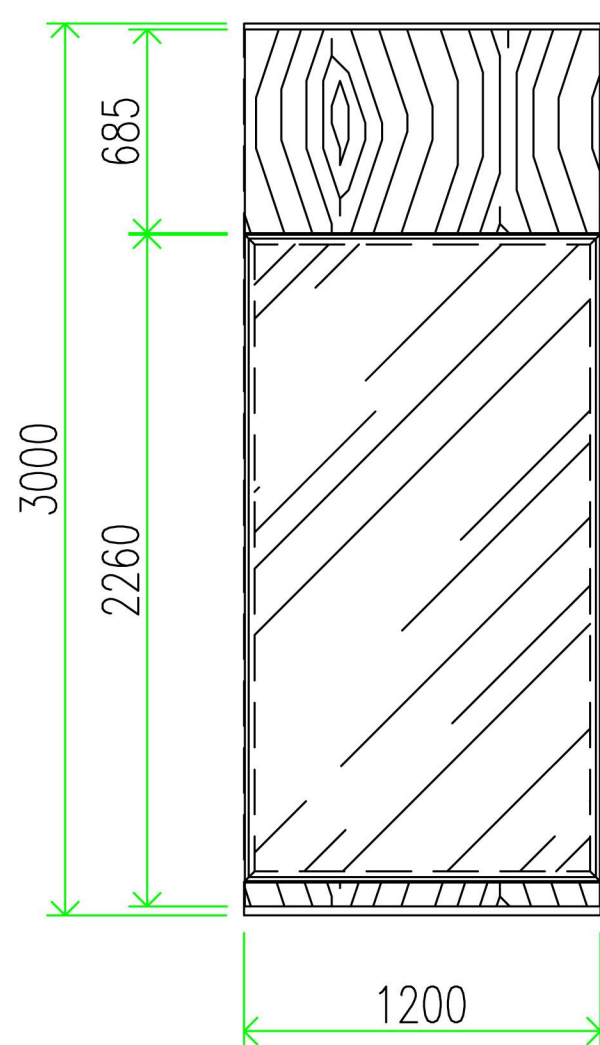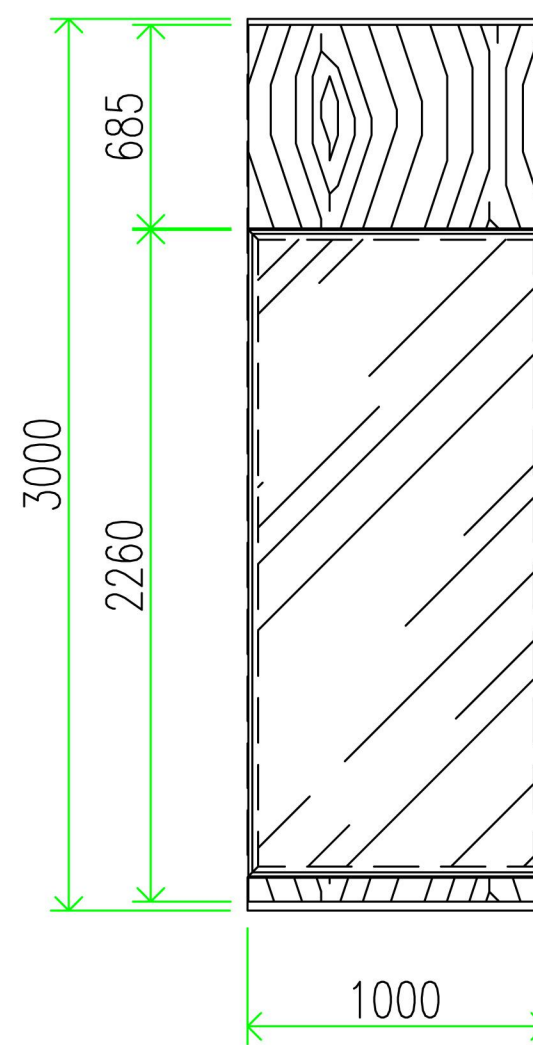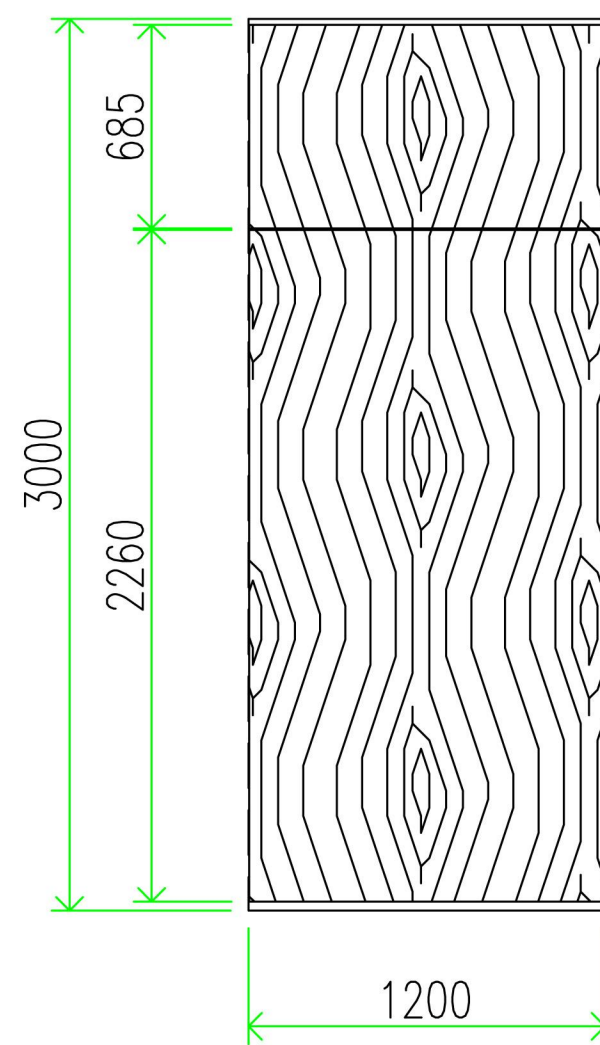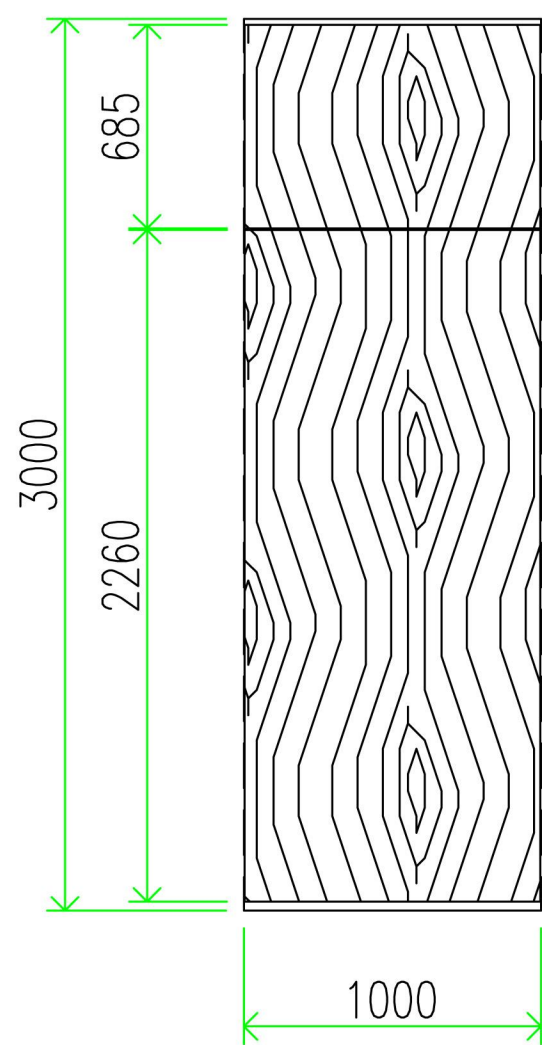



Steeple (double-side) Technical data

